


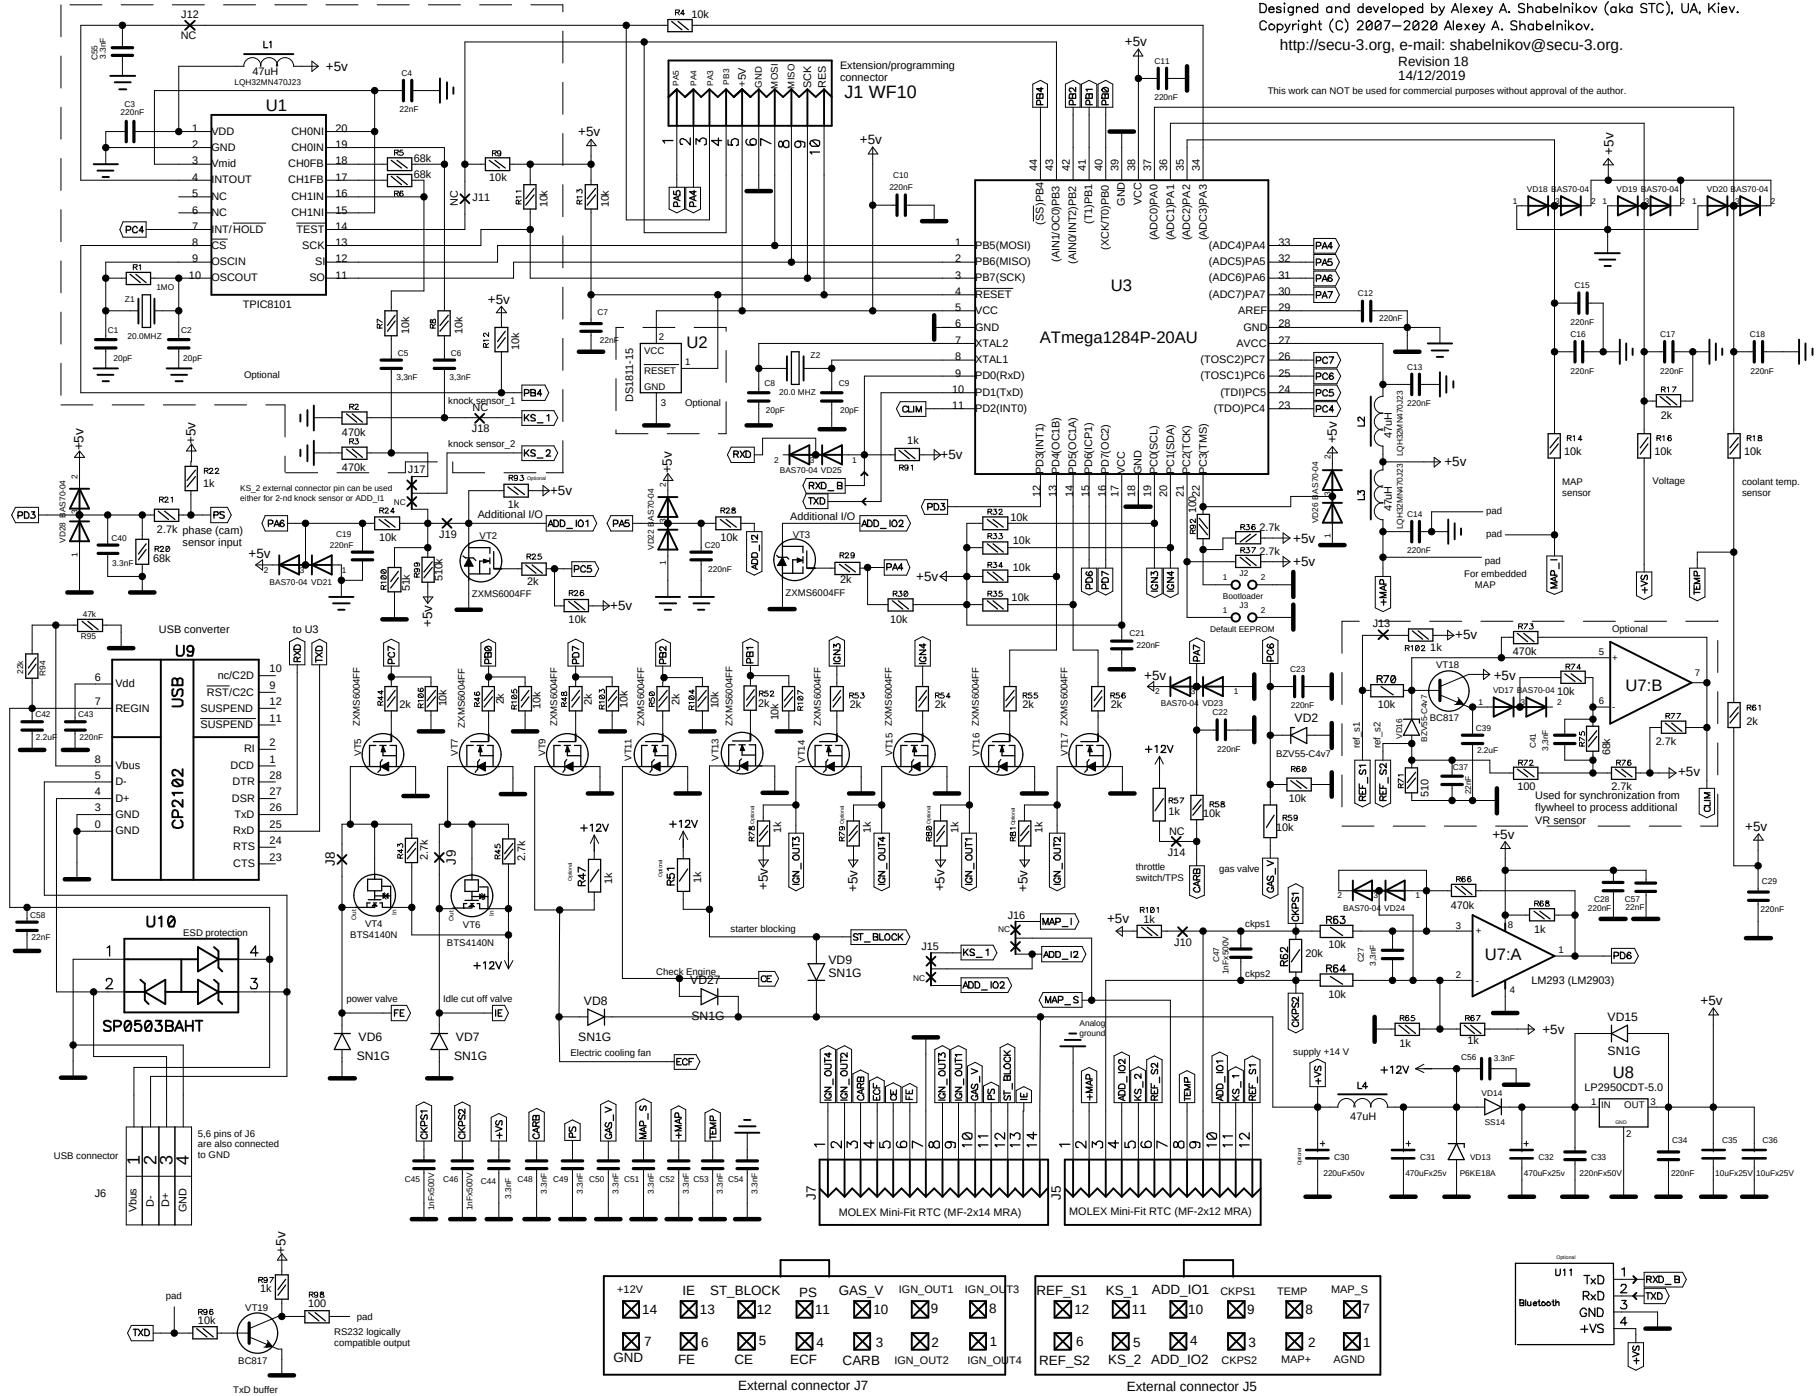

NC - normally connected

0.125W resistors: SMD 0805.
 0.25W resistors: SMD 1206.
 Inductors: SMD 1210, except L4.

R78, R79, R80, R81, R93 - Are optional pullup resistors
 R47, R51 are optional and can be soldered
 either to +5V or +12V
 See pads of additional pull up resistors on PCB.

SMD1206 capacitors: C35, C36
 All ceramic bypass capacitors: X7R 0805 (U >= 50V), except C45, C46, C47 (U >= 50V).
 Electrolytic capacitors (Size 10x16mm): C30, C31, C32.